
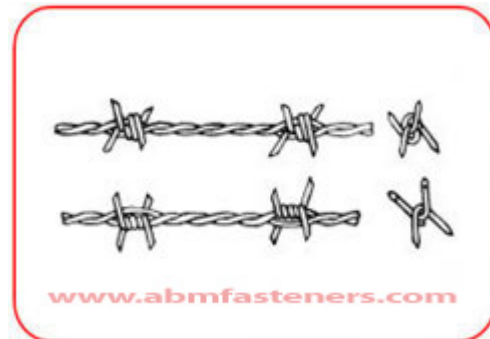


# BARBED WIRE MAKING MACHINES

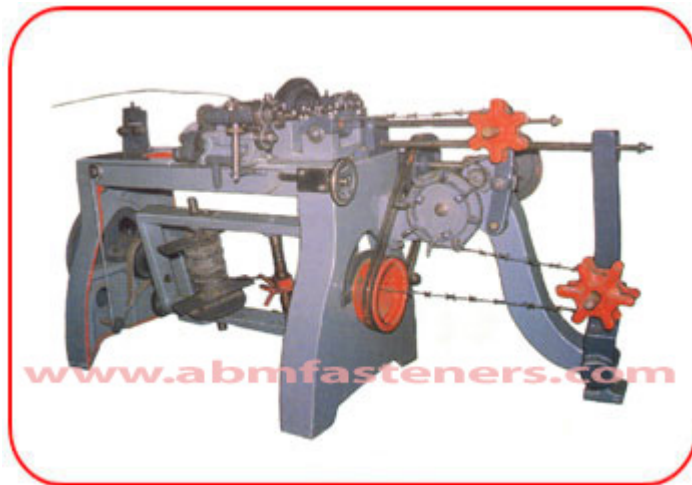

## FEATURES

- The machine is extremely rigid to withstand overloading.
- The High Speed Winding Unit revolves at approximately 180 RPM.
- It produces both IOVA (Type A) and GLIDDEN (Type B) double ply Barbed Wire with 2 Point, 4 Point consecutively.
- The machine is designed in it's heavy structure using closed Grain Cast iron and steel.
- Easy Parts adjustments and easy Maintenance.
- Operator has an easy approach in setting all arms, cutters by making the machine parts fool proof.
- It ensures easier dismantling, assembling, loading, unloading as well as consequent view over flow of formed wire.
- The machine can also produce wire from 12/14 or 14/14 SWG Wire at the cost of production capacity.

## SPECIFICATION

Item Code No.	<b>ABM-FM-6890</b>
Stand and Point Wire	12 / 12 SWG (i.e. 2.5-2.5 / 2.5-2.8 mm Diameter) (Optional 12 x 14 / 14 x 14 SWG)
Tensile Strength	Hard Bright, fully hot dip galvanized wire with under 30 to 55 kg. F / Min
Capacity Production	500 Kgs / 8 Hour Shift for 12/12 SWG Wire with 140 to 220 barbs / min. Capacity to coil bundles of 400 meters (Bundle size 16" dia. x 10" width. Weight 40 / 50 Kgs.)



Barb Spacing	3" to 4" pitch, adjustable with additional gears in winding unit (optionally supplied)
Motor Required	5 H.P. / 960 R.P.M.
Net Weight	1200 Kg.
Gross Weight	1400 Kg.
Case Size	2650 x 1350 x 1150 mm

All Specifications are subject to change towards improvements without any prior notice.

**Manufactured by ABM Fasteners (India) and Export Marketing by ABM Tools**



Postal Address : 79A, Pocket GG-1, Vikas Puri, New Delhi – 110018, India  
Phone : 91 98910 27608 / 91 11 2854 6891 Fax : 91-11-2854 0898  
[www.abmtools.com](http://www.abmtools.com)  
[www.abmfasteners.com](http://www.abmfasteners.com)  
e-mail : [abmtools@vsnl.net](mailto:abmtools@vsnl.net)  
[sales@abmfasteners.com](mailto:sales@abmfasteners.com)